


39. Using the Multi host plugin in Bitwig

Bitwig uses a sandbox process to host plugins. If you remove the **last** MP Multi host plugin and try to load another one, Bitwig will not be able to load it.

One option to address this problem is to always keep **one** Multi host plugin loaded.

The other option is, if you have removed the last one Multi host plugin, just double click on the MPHCSM.exe (Windows in the ~/MP/Host folder) or MPH Cache.app (Mac in Applications) to clear the cache and load the Multi host plugin.

Important: In Bitwig setting > plugins > Plugin hosting mode set it to: Bitwig or Together or Vendor

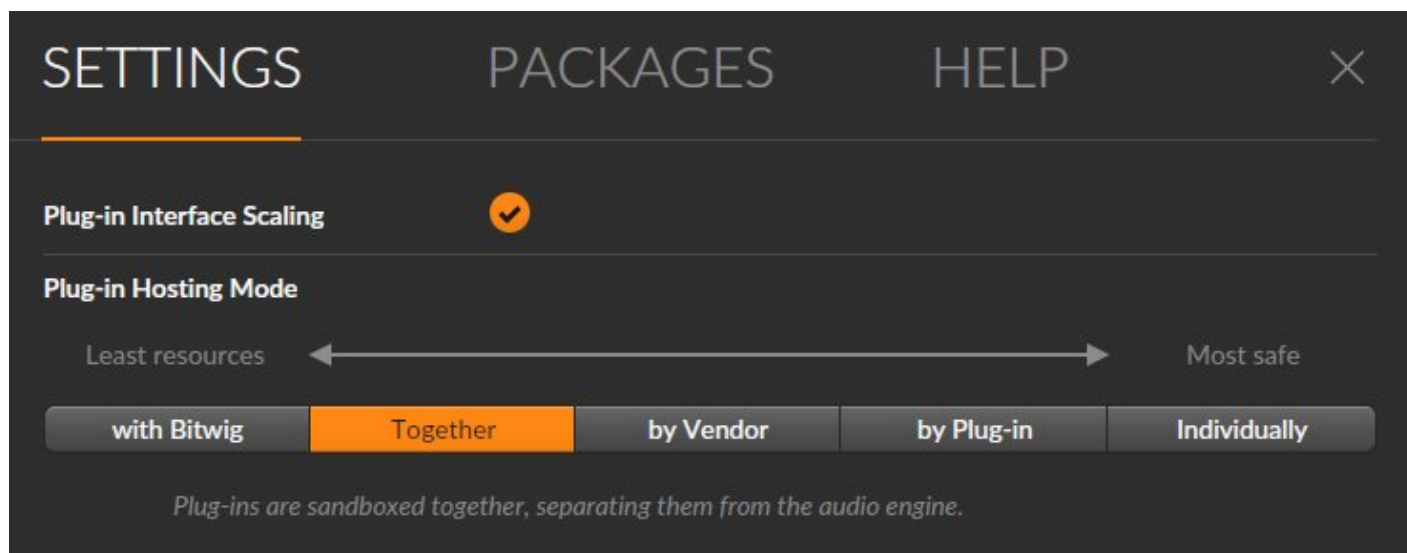

Revision #2

Created 26 April 2025 05:04:18 by Admin

Updated 4 May 2025 12:43:35 by Admin